


Sun Odyssey 50 DS

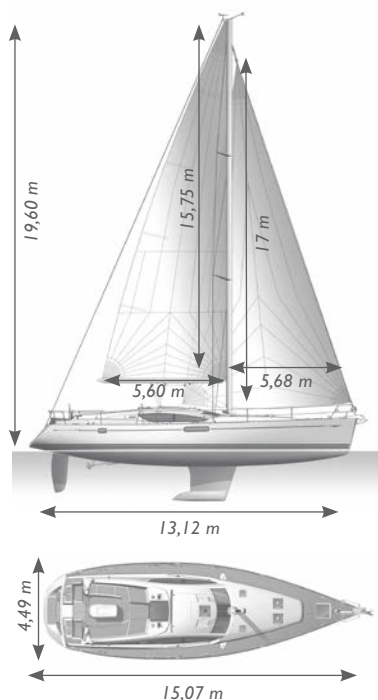

Certification conform with CE regulation.

SO 50 DS

SPECIFICATIONS	
Overall length	15,07 m
Hull length	14,75 m
Waterline length	13,12 m
Beam	4,49 m
Displacement light load with deep draft keel	13400 kg
Standard draft cast iron fin keel with elongated bulb and exterior epoxy barrier coat	2,15 m
Standard keel weight	3750 kg
Shoal draft cast iron fin keel with elongated bulb and exterior epoxy barrier coat	1,69 m
Shoal keel weight	4100 kg
CE category	A10/B12/C14
Architect / Designer	B. Briand / V. Garroni
Water rotomolded tanks located under forward and aft berths with separate deck fills	615 L
Fuel rotomolded tank located under aft berth with deck fill	240 L
Holding tank rotomolded tank located in aft, port head compartment with valve for overboard discharge via gravity and deck fitting for pump out	85 L
Fridge compartment with vertical access	255 L
SAILS	
Furling mainsail high-tenacity Dacron cloth, Sunbrella® UV luff protection, Rutgerson® stainless steel eyes	■ 39 m ²
Classic mainsail	□ 49,2 m ²
Furling genoa 140% high-tenacity Dacron cloth, Sunbrella® UV luff protection, Rutgerson® stainless steel eyes	■ 62,1 m ²
Spinnaker optimal size for boat (not available from Jeanneau)	141 m ²
Total sail area for standard mast and sails	101,1 m ²

■ Standard □ Option - Not available

WINCHES	
Genoa winches 2 x Harken, self-tailing winches, size	60,2
Coachroof winches 2 x Harken, self-tailing winches, size	46,2
Electric genoa winches 2 x Harken, 12v self-tailing in place of standard winches	<input type="checkbox"/>
Electric coachroof winch 1 x Harken, 12v self-tailing in place of standard winch to port	<input type="checkbox"/>
SAIL HANDLING	
Genoa tracks adjustable Harken lead cars with control line lead aft to cockpit	■
Winch handles 2 x Harken handles with ball-bearing grip	■
Line jammers Spinlock, on both sides of coachroof with Harken return blocks	■
Mainsheet traveller long, roof-mounted Harken traveller with ball-bearing cars, control lines lead aft to cockpit	■
Padeyes Wichard for spinnaker turning blocks, tweaker lines, pole downhaul	■
Spinnaker deck hardware triple Spinlock jammer to starboard and an additional 3-sheave return block on deck	■
Asymmetrical spinnaker gear halyard, 2 sheets, tack line lead forward on deck, reinforced fitting on anchor roller, Harken blocks	<input type="checkbox"/>
MAST AND RIGGING	
Furling mast	■
Classic mast	<input type="checkbox"/>
Standing rigging discontinuous 1x19 stainless steel wire	■
Backstay fixed, double	■
Genoa furler with attachment to stemhead fitting and furling line lead aft to roof winch	■
Running rigging polyester topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets	■
Releasable forestay for storm sail, attaches to padeye in front of the anchor locker, stay is equipped with quick release and adjustment mechanism, inner stay is attached to a padeye on starboard side deck when not in use	<input type="checkbox"/>
COCKPIT & DECK STORAGE	
Teak inlay on seating area, transom and transom steps	■
Teak cockpit floor inlay	<input type="checkbox"/>
Teak side decks hand-laid teak side decks	<input type="checkbox"/>
Cockpit lockers 1 locker under bench seat to port and 2 lazarette lockers under the helm seats for technical access to steering system	■
Cockpit table folding injected fibreglass table with storage, cup holders, bottle holders, stainless steel handrail, courtesy lighting, 12v plug	■
Teak cockpit table with all the same functions of above, but with teak leaves and top, Sunbrella® Taupe cover	<input type="checkbox"/>
Gas locker room for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley	■
Liferaft locker under teak grating between helm positions and access from opening transom steps	■
Wheels 2 leather-covered steering wheels and compasses at each helm station	■
Steering wheel covers Sunbrella® Taupe with zips for easy removal	<input type="checkbox"/>
Instrumentation dedicated space for instruments within easy reach of helm positions, room for GPS chartplotter mounted at aft end of cockpit table with easy viewing from each helm	■
Engine controls throttle and engine panel includes RPM gauge, warning lights, ignition	■
Swim ladder stainless steel folding ladder mounted on swim platform	■
Opening transom stairs hinge up for access to liferaft, can be locked closed, access to optional generator door	■
Cockpit shower retractable hot and cold water shower with tap	■
Cockpit cushions Sunbrella® Sling Taupe cushions for seating area with attachment clips	<input type="checkbox"/>
Cockpit bimini Sunbrella® Taupe two tone with leather details, integrated LED lighting and stainless steel bows, retractable with storage cover	<input type="checkbox"/>
Cockpit sprayhood wide Sunbrella® Taupe two tone with leather details with vinyl windscreen with zip-out middle window for ventilation, retractable	<input type="checkbox"/>
Teak step on coaming	PREMIÈRE
Anchor locker forward, lockable, room for anchor and tackle, integrated windlass area, holder for windlass handle	■
Deep sail locker forward, accessible via opening deck hatch with lock, stainless steel ladder, lighting, access to windlass controls	■
DECK HARDWARE	
Bow pulpit open, stainless steel	■
Stern pulpits stainless steel with buoy bracket	■
Outboard engine bracket for stern pulpit	<input type="checkbox"/>
Windlass LEWMAR 1500W combination rope and chain 12mm, vertical-mounted in the anchor locker with above-deck line drum, hand-held remote, manual handle	■
Windlass control second windlass control mounted in cockpit with chain counter for easy, short-handed anchoring	<input type="checkbox"/>
Anchor roller double stainless steel fitting with self-launching roller for hands-free launching and retrieving	■
Anchoring kit Delta anchor 25 kg with 40 meters of 12mm chain and 50 meters of 22mm line	<input type="checkbox"/>
Lifelines double level of stainless steel lifelines with PVC coating and stainless steel stanchions	■
Lifeline gates opening gates on each side	■
Toerail teak profile with integrated chocks and drainage for side deck	■
Cleats 6 x aluminium mooring cleats	■
Rubrail for hull protection	<input type="checkbox"/>
Mooring kit fenders and docklines	<input type="checkbox"/>
Handrails sculpted, long stainless steel handrails on coachroof for secure movement forward	■

■ Standard Option - Not available

TECHNICAL FEATURES AND OPTIONS**CONSTRUCTION**

Deck hand-laid fibreglass deck, ISO glecoat surface, discontinuous balsa block coring, interior fibreglass deck counter mould

Hull solid, hand-laid fibreglass, ISO glecoat surface, vinyl ester resin in outer skin protective barrier coat to protect against osmosis

Structure 3rd generation inner fibreglass grid, high-load zones cut out and relaminated, drainage system through structure, special emergency repair zone in keel area

LIGHTING

LED navigation lights and anchor light

PREMIÈRE

Flush mounted LED chromed brass ceiling lights in saloon, head compartments and cabins

On/off switches in saloon for overhead lights

Red/white combination light for night vision at nav station

ELECTRICAL

Red/white combination light for night vision at nav station

12v alternator output

80 A

Charge distributor/isolator

Engine start battery capacity

110 Ah

Domestic battery bank capacity

345 Ah

Extra 115 Ah domestic battery

PREMIÈRE

Positive battery switch for engine bank, positive battery switch for domestic bank and negative general cut-off switch

220v shore power inlet with differential breaker

60A battery charger, multi-phase

PREMIÈRE

Electrical panel with 12v breakers, 220v breakers, LCD display with 12v voltmeter, 12v consumption meter, fuel and water tank gauges, backlight

One 220v and 12v plug per cabin, 220v plugs in galley, saloon and nav station

220v stainless steel microwave

Generator 6kw ONAN 220v located under the liferaft locker in the transom with special access panel, power selector switch and generator panel located at nav station, exhaust separator with below waterline discharge for silent operation

PLUMBING

Hot and cold pressurised water distributed through-out the boat via semi-rigid hose

"heavy-duty" water pump and accumulator tank for consistent water pressure

40 litre hot water tank that is connected to engine heat exchanger and to 220v electrical system

Chromed shower faucets in washrooms

Shower sumps equipped with individual electric pumps and on-off switches

Large manual pump marine toilets

Jabsco electric quiet-flush toilets in place of standard, available for each head compartment

73 litre holding tank with gravity drain and deck fitting for other head compartments (port aft head equipped with standard tank), available for each head compartment

ENGINE

Yanmar 4JH4 TE **75 HP, sail drive** 55Kw, turbocharged, latest generation of environmentally friendly engines

360 Docking system-Yanmar 4JH4 TE **POD 120** engine with pivoting sail drive unit and joystick (includes bow thruster and auto pilot)

Fully soundproofed engine compartment with engine access behind stairwell and from aft cabin

Fuel/water separator

Built-in muffler, forced air ventilation and stainless steel exhaust fitting aft

Fixed 3-blade bronze propeller

3-Blade folding propeller

Bow thruster

C O M F O R T

Fixed hull ports with track-mounted curtains

4

Opening cockpit and roof ports with curtains

6

Opening deck hatches forward-facing with sun blinds and insect screens integrated into headliner

3

CD/radio/MP3 player in saloon

Bose® 2.1 speaker system ACCOUSTIMASS 3, speakers with base unit in saloon

PREMIÈRE

Cockpit speakers watertight

PREMIÈRE

TV LED 22" mounted on an articulating arm on main saloon bulkhead to port of the forward cabin doorway

DVD player in saloon (replaces standard CD player)

Combination washer/dryer machine 5kg 220v installed in bar forward of the nav station

Air Conditioning 220v 24000 BTU 2 units with digital controls and vents in saloon, forward and aft cabins

Forced air heating 1 unit 5500 BTU and 1 unit 3900 Webasto® diesel heaters installed in cockpit lockers, vents in forward and aft cabin, saloon and head compartments

■ Standard □ Option - Not available

	SO 50DS			
	2C/2H	3C/2H	3C/3H	4C/3H
INTERIOR FEATURES AND OPTIONS				
WOOD				
Fine Teak® interior laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish	■	■	■	■
Laminate floorboards with light-coloured lines, varnished edges	■	■	■	■
FORWARD CABIN				
Forward owner's cabin with central berth	■	■	-	-
Double berth, with PREMIUM mattress	2,02 m x 1,6 m	2,02 m x 1,6 m	-	-
Mattress battens under high-density foam mattress for increased comfort	□	□	-	-
Cushioned seat	■	■	-	-
Storage under berth	■	■	-	-
Large hanging locker	■	■	-	-
Desk/vanity in forward cabin with storage, light, mirror and seat	■	■	-	-
Wood and white upholstered panels along hull	■	■	-	-
Storage lockers along hull sides with gas lifters and indirect lighting underneath	■	■	-	-
Private forward owner's head compartment with stainless steel sink, separate shower with folding plexiglass door, mirrors, towel holder, toilet paper holder, wastebasket, storage cabinet above sink, shower sump with grate and foot switch operated electric drainage pump	■	■	-	-
Twin forward cabins transformable into single cabin by easily removable longitudinal bulkhead, storage for bulkhead under berth	-	-	■	■
Double berths with PREMIUM mattresses	-	-	2x2,06 x 1,45 m	2x2,06 x 1,45 m
Storage under berth with deep cabinet with shelves and hanging rod in each cabin	-	-	■	■
Fabric hull liner	-	-	■	■
2 head compartments forward with sink, shower, clothes hook, mirror, towel holder, toilet paper holder, wastebasket, cabinet above sink and shower sump with grate and electric drainage pump	-	-	■	■
AFT CABIN				
Aft owner's cabin with reading lights at head of berth	■	-	■	-
Central double berth with wood trim and padded headboard, PREMIUM mattress	2,02 x 1,5 m	-	2,02 x 1,5 m	-
Mattress battens under high-density foam mattress for increased comfort	□	-	□	-
Storage compartments along hull with indirect lighting underneath and closed hanging lockers to either side of berth	■	-	■	-
Seating to either side of the berth	■	-	■	-
Wood and white upholstered panels along hull	■	-	■	-
Private aft owner's head compartment with stainless steel sink, separate shower with folding plexiglass door, mirrors, towel holder, toilet paper holder, wastebasket, shower sump with grate and foot switch operated electric drainage pump	■	-	■	-
Twin aft cabins	-	■	-	■
Double berths with PREMIUM mattresses	-	2,02 m x 1,5 m	-	2,02 m x 1,5 m
Storage compartments along hull with indirect lighting underneath and closed hanging lockers	-	■	-	■
Wood and white upholstered panels along hull	-	■	-	■
Head compartment accessible from saloon or aft cabin with stainless steel sink, shower, mirrors, towel holder, toilet paper holder, wastebasket and shower sump with grate and foot switch operated electric drainage pump	-	■	-	■
NAVIGATION STATION				
Navigation station full-function with general electrical panel	■	■	■	■
Forward-facing navigation desk with nav seat and storage underneath	■	■	■	■
Navigation desk with roll-away top and pass-through for pugs to facilitate the use of a laptop computer	■	■	■	■
Leather-wrapped stainless steel handrail and leather-lined pen holder	■	■	■	■
Large storage drawer with divider under nav station/bar cabinet	■	■	■	■
SALOON				
Saloon with u-shaped seating area to starboard, wrap-around cushions and storage under seating area	■	■	■	■
Saloon dining table with fiddles, removable pedestal legs	■	■	■	■
Cushion to fit over saloon table and support beams to turn standard table into a double berth	□	□	□	□
Deluxe saloon table with fixed storage base, inlaid table top, and folding leaves	□	□	□	□
2 removable luxury armchairs with tiedowns for saloon	□	□	□	□
Storage cabinets along hull	■	■	■	■
Lounge seating to port	■	■	■	■
2 removable storage bins located under floorboards	■	■	■	■
Companionway made of laminate and solid wood trim with curved, hinged for access to engine, leather-wrapped handrails to either side	■	■	■	■
Removable carpet set for main saloon	□	□	□	□
GALLEY				
Galley with double sinks with covers and solid surface countertop chrome plumbing fittings, storage cabinets and drawers	■	■	■	■
L-galley to port with glass separator between galley counter and seating area	■	■	■	■
Gimballed 2-burner stove with oven with stainless steel protection bar	■	■	■	■
3-burner stainless steel stove with thermostatically controlled oven, in place of regular stove/oven unit	PREMIÈRE	PREMIÈRE	PREMIÈRE	PREMIÈRE
Double fridge box, top-loading with 2 opening lids, storage bins, 12v refrigeration and gas lift for door in large box and compressor	■	■	■	■
12v freezer unit for smaller fridge box with separate compressor	PREMIÈRE	PREMIÈRE	PREMIÈRE	PREMIÈRE
Stainless steel vertical access door to large fridge box, includes wire shelving inside fridge box for increased storage	□	□	□	□
HEAD ROOM				
Forward cabin(s)			1,92 m	
Aft cabin(s)			1,90 m	
Companionway			2,04 m	
Saloon			1,98 m	
Galley			2,18 m	

■ Standard □ Option - Not available C = Cabins H = Head



JEANNEAU

Ets JEANNEAU - BP 529 - 85505 LES HERBIERS CEDEX - FRANCE - TEL +33 (0)2 51 64 20 20 - FAX +33 (0)2 51 67 37 65

INTERNET : <http://www.jeanneau.com>

